

Insulated Roller Bearing Swivel (SKLI)



- Roller bearing swivel can rotate under full load
- Insulated to 1000 Volts DC
- Can be attached to any of the other SK System components.
- Supplied from the factory with a marine rated lubricant
- Full traceability
- Proof tested and certified


INSULATED SWIVEL - SKLI INSULATION CAPACITY 1000 VOLTS DC

MODEL	CHAIN SIZE (IN)	GRADE	WORKING LOAD LIMIT * (LBS) at 90°	DIMENSIONS (INCHES)		WEIGHT (LBS)
				L	D	
SKLI-7/8-8	9/32	80	3,500	3.0	1.9	1.5
SKLI-7/8-8	5/16	80	4,500	3.0	1.9	1.5
SKLI-10-8	3/8	80	7,100	3.8	2.3	3.1
SKLI-13-8	1/2	80	12,000	4.7	3.0	6.4
SKLI-16-8	5/8	80	18,100	5.4	3.5	10.8
SKLI-18/20-8	3/4	80	28,300	6.3	4.1	15.9

*Design Factor 4:1 Proof tested and certified

INSULATED SWIVEL ASSEMBLY - SKLI INSULATION CAPACITY 1000 VOLTS DC

MODEL	CHAIN SIZE (IN)	GRADE	WORKING LOAD LIMIT * (Lbs) at 90°	WEIGHT EACH (LBS)	REACH (IN)
589350	9/32	80	3,500	3.2	10.2
589350	5/16	80	4,500	3.2	10.2
589351	3/8	80	7,100	6.3	13.0
589352	1/2	80	12,000	12.6	15.7
589353	5/8	80	18,100	21.4	18.6
589354	3/4	80	28,300	32.8	21.3

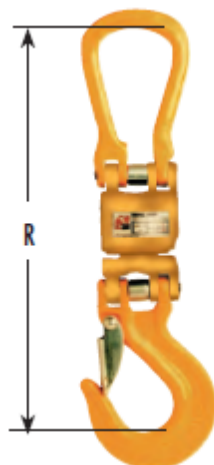

Systems contain (one each per size):
 "SKO" Master Link
 "SKLI" Ball Bearing Swivel
 "SKN" Sling Hook with Latch